



SPECIFICATIONS MODEL 7250

Cat. No. 304251

Reth Way Model 7250 Single Channel DB37 A/B Switch

• Ideal for DB37 interface devices, or switching to backup!

INTRODUCTION

The PathWay® Model 7250 Single Channel DB37 A/B Switch allows the user the capability of sharing a single port interface device connected to the Common port among two other devices connected to the "A" and "B" ports. The Model 7250 is packaged in a slim desktop style enclosure.

The switch may be controlled manually via front panel pushbuttons only. Switch position status may be attained via the front panel LED display.

FEATURES:

- Allows quick connection to any one of two devices from one COMMON device.
- The switch ports are transparent to all data.
- 36 Pins (2-37) of the DB37 interface are switched via break-before-make electromechanical relays. Pin 1 is carried through.
- The unit maintains last set position on power loss and continues to pass data.
- Front panel pushbutton control.
- No Remote Control.
- Front panel LED's display present position and power status.
- Eliminates the need to plug and unplug cables.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Custom length DB37 cables available for your switch installation.
- Municipalities, schools, government: This product on GSA Schedule!



SPECIFICATIONS:

PORT CONNECTORS: (3) DB37 female connectors on rear panel are labeled A, B and COMMON.

FRONT PANEL CONTROL: (1) Manual pushbutton allows local switching.

DISPLAY: (2) Front panel LED's display switch position and power status.


POWER: UL approved 100VAC-240VAC, 50Hz-60Hz wall mount power module supplies 12 VDC, 500mA to the unit. Has 2-prong, US, non-polarized plug.

DIMENSIONS: Desktop 13.5" W x 2.36" H x 7.28" D.[34.3 x 6.0 x 18.5 cm]

WEIGHT: Approximately 2.4 lbs. [1.1 kg]

WIDE RANGE POWER OPTION AVAILABLE:

(Cat No 517277) **CE, and UL** listed table mount power module, 100VAC-240VAC, 50Hz-60Hz for use in place of standard power module that is included with the unit. Has IEC 60320 C14 inlet. **Ideal for international applications.**

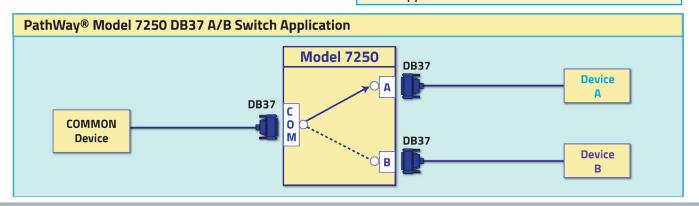

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com