



SPECIFICATIONS MODEL 7322R (Cat. No. 307322R)

LineSelect Model 7322R 8-Channel RJ45 Cat6 A/B Switch, Manual, Simultaneous Control, Rackmount, RoHS Compliant

- All Ports Are Shielded RJ45 Connectors
- Applicable to switching ANY RJ45 Interface, quickly and reliably.

INTRODUCTION:

The **LineSelect®** Model 7322R is an 8-channel RJ45 A/B Switch. All eight channels switch to A or B simultaneously. Each of the eight channels reroutes data from its COMMON port to its A or B port, depending on switch position. The unit supports all 8 pins of the RJ45 Cat6 interface. The Model 7322 is enclosed in a 2U, full rack size, all metal black chassis designed to provide EMI/RFI shielding.

FEATURES:

- LineSelect® Model 7322R allows quick connection to any one of two devices from one COMMON device for each channel.
- Certifed Cat 6 Compliance
- Certified RoHS Compliant
- All ports are shielded RJ45 connectors.
- All 8 pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- The switch ports are transparent to all data.
- Simultaneously switches all eight channels via front-panel rotary switch.
- High quality sealed switch with self-wiping precious metal contacts.
- Eliminates the need to plug and unplug cables.
- No external power is required.
- Rackmount configuration.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Lifetime warranty against manufacturing defects.
- Custom length Cat6 cables available for your switch application.

LineSelect Model 7322R



SPECIFICATIONS:

PORT CONNECTORS: (3) Shielded RJ45 female connectors labeled A, B, and COMMON, for each of 8 channels.


FRONT PANEL CONTROLS: (1) Rotary switch on front panel selects A or B for all eight channels, simultaneously.

POWER: No power required. Manually operated. **DIMENSIONS:** Rackmount 19.0" W x 3.5" H x 8.75" D.

DIMENSIONS: Rackmount 19.0" W x 3.5" H x 8.75" D. (48.3 x 8.9 x 22.3 cm)

WEIGHT: 6.3 lbs. (2.9 kg)

Order Custom Length Cat6 Cables for Optimum Performance!

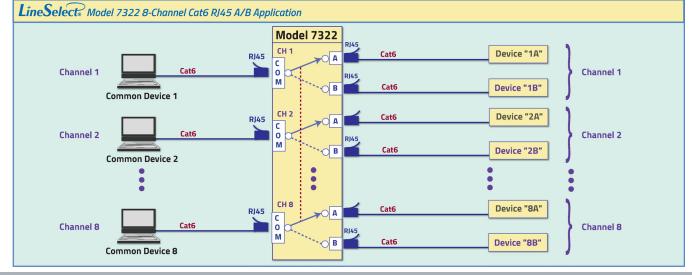

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com