



SPECIFICATIONS MODEL 8403R

Cat. No. 308403R

LineSelect Model 8403R Dual-Channel, 3-Position, Keyboard/Video Switch One Channel PS/2 Keyboard and One Channel VGA Monitor, Manual, Simultaneous Channel Control, Rackmount

INTRODUCTION

The **LineSelect®** Model 8403R 3-Position PS/2 Keyboard/Video Switch is designed to allow access from one computer to three locations having a keyboard, and monitor. A front panel selector allows quick and easy switching of the shared device. The **LineSelect®** Model 8403R is enclosed in a 2U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

FEATURES:

- Manually control both channels simultaneously via one knob located on the front panel.
- Manual reset button located on front panel
- All pins of the HD15 and Mini Din interface are switched via break-before-make rotary switch.
- All ports located on the rear panel:
- o (4) HD15 female VGA Monitor ports: (1) A , (1) B, (1) C, and (1) D.
- o (4) 6-Pin Mini Din female PS/2 Keyboard ports: (1) A , (1) B, (1) C, and (1) D.
- Front panel knob labeled "A", "B" and "D" position.
- Front panel reset button labeled "PUSH AND HOLD TO UNLOCK KEYBOARD".
- Back panel ports are labeled left to right: "D". "C", "B" and "A".
- Port C is the COMMON port.
- Lifetime warranty against manfacturing defects.
- RoHS Compliant.



SPECIFICATIONS:

PORT CONNECTORS:


(4) HD15 VGA Monitor female connectors labeled D, C, B and A. C = COMMON port.

(4) Mini Din female PS/2 Keyboard connectors labeled D, C, B and A. C = COMMON port.

FRONT PANEL CONTROL: (1) Rotary switch on front panel select A, B, or D position. (1) Keyboard Reset button labeled "PUSH AND HOLD TO UNLOCK KEYBOARD"

POWER: No power required. Manually operated. **DIMENSIONS:** Rackmount 19.0" W x 3.5" H x 6.0" D. (48.3 x 8.9 x 15.3 cm)

WEIGHT: Approximately 5.2 lbs. (2.4 kg)

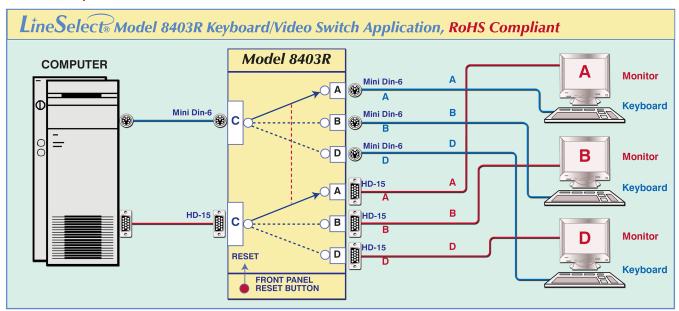

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com