SPECIFICATIONS MODEL 9264

(Cat. No. 309264)

LineSelect Model 9264 Dual-Channel RJ45 CAT6 and DB9 A/B Switch, Manual Operation

- Channel 1 is CAT6 compliant
- Simultaneously switches DB9 and RJ45 Cat 6 interfaces INTRODUCTION

The *LineSelect*® Model 9264 Dual Channel DB9/RJ45 CAT6 A/B Switch allows the user the capability of sharing a single port interface device connected to the "COMMON" port among two other devices connected to the "A" and "B" ports, for both the DB9 interface and the RJ45 interface.

The *LineSelect*® Model 9264 may be controlled manually via the front panel control knob, which switches both channels of the Model 9264 *Simultaneously*.

Switch position status may be attained via the indicator on the front panel rotary knob.

The *LineSelect*® Model 9264 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 8" 1/2 rack.

FEATURES:

- Simultaneously switch one RJ45 channel and one DB9 channel via one rotary knob located on the front panel.
- RJ45 channel is CAT6 compliant.
- All 9 pins of the DB9 interface are switched.
- Transparent to data speed and format.
- All ports are located on the rear panel:
 (3) RJ45 female ports: (1) A, (1) B, and (1) COMMON
 (3) DB9 female ports: (1) A, (1) B, and (1) COMMON
- Chassis Dimensions: 8" (1/2 rack) Wide x 1.75" (1U) High x 8" Deep.
- Includes mounting bracket set, part number 512959
- No external power required.
- Lifetime warranty against defects on manufacturer parts and labor.



SPECIFICATIONS:

PORT CONNECTORS:

(3) DB9 female connectors labeled A, B, and COMMON for channel 2.

(3) RJ45 female connectors labeled A, B, and COMMON for channel 1.

CONTROL: (1) Front-panel rotary knob allows for local switching of both channels simultaneously.


DIMENSIONS: 8.31" W x 1.75" H x 8.25" D.


(48.3 x 4.5 x 21.0 cm)

WEIGHT: Approximately 2.4 lbs. (1.1 kg)

DB9 and RJ45 Cables Available at Any Custom Length!

Please See Cable Chart Below

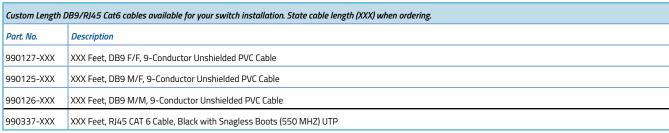

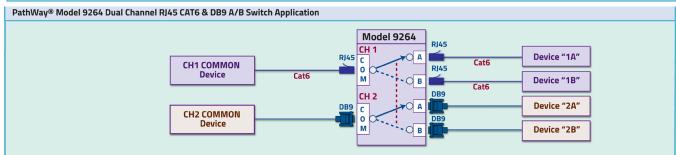

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com