







LineSelect Model 9066 8-Channel RJ45 (2 Pair) 10 Base-T A/B Switch

INTRODUCTION

The *LineSelect*® Model 9066 A/B Switch allows the user to reroute data between two networks with a simple push of a button. The eight pushbuttons change color to indicate A or B switch status. Each channel enables access to two 10 Base-T networks. The unit supports 4 pins of the RJ45 interface. No need to plug and unplug cables thereby eliminating connector wear.



- Each channel allows access to two networks from one computer or workstation.
- Manual operation via front panel pushbuttons
- Eliminates the need to plug and unplug cables
- RoHS compliant!
- No power requried.
- Transparent to data format.
- Standard & custom length RJ45 cables for this switch are available in multiple colors and in any length!
- ★ Municipalities, schools, government: This product is on GSA schedule!



SPECIFICATIONS:

PORT CONNECTORS: (24) RJ45 female connectors labeled A, B, and COMMON.

FRONT PANEL CONTROL: (8) Manual pushbuttons allow local switching between positions A and B.

POWER: No power required.


PINS SWITCHED: 4 pins switched (2 Pair:

1&2, 3&6)

ENCLOSURE: Shielded aluminum enclosure. **DIMENSIONS:** Rackmount, 19.0" W x 3.5" H

x 8.0" D.

WEIGHT: Approximately 5.0 lbs.

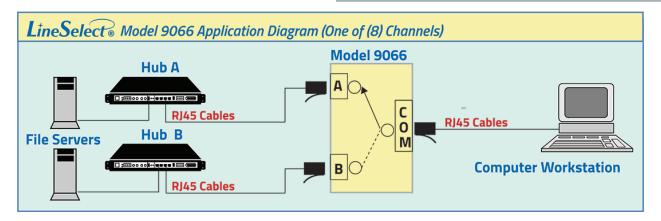

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax: 401-946-5790 www.ElectroStandards.com E-mail: eslab@ElectroStandards.com