

SPECIFICATIONS MODEL 9455

(Cat. No. 309455)

LineSelect Model 9455 Dual Channel RJ45 Cat5e A/B Switch, Manual, Simultaneous Switching, Rackmount

- Certified for Cat 5e Compliance.
- Share ANY RJ45 interface networks or devices, "quick and easy"!
- Field Proven, Highly reliable!

INTRODUCTION:

The *LineSelect*® Model 9455 is a dual-channel RJ45 Cat5e A/B Switch. Both channels switch to A or B simultaneously. Each of the two channels reroutes data from its COMMON port to its A or B port, depending on switch position. The *LineSelect*® Model 9455 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding.

FEATURES:

- Each channel allows quick connection to any one of two devices from one COMMON device.
- Rated for 10/100/1000 Base-T networks (Up to Cat 5e).
- All 8 pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- Transparent to data speed and format.
- Simultaneously switches both channels via front-panel rotary switch.
- High quality sealed switch with self-wiping precious metal contacts.
- Eliminates the need to plug and unplug cables.
- No external power is required.
- Rackmount configuration.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Lifetime warranty against manufacturing defects.
- Custom length Cat5e cables available for your switch application.



SPECIFICATIONS:


PORT CONNECTORS: (3) RJ45 female, an A, B, and COMMON for each of the two channels.

FRONT PANEL CONTROLS: (1) Rotary switch on front panel selects A or B for both channels, simultaneously.

POWER: No power required. Manually operated. **DIMENSIONS:** Rackmount 19" W x 1.75" H x 8" D.

(48.3 x 4.4 x 20.3 cm) **WEIGHT:** 3.9 lbs. (1.8 kg)

Order
Custom Length
Cat5e Cables for
Optimum Performance!

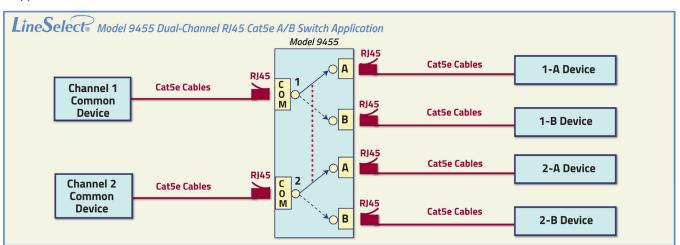

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com