





SPECIFICATIONS MODEL 9715R

(Cat. No. 309715R)

LineSelect Model 9715R 8-Channel RJ45 Cat5e Compliant A/B Switch, Manual, Individual Channel Control, Rackmount

• Certified Cat5e and RoHS Compliant.

INTRODUCTION

The *LineSelect*® Model 9715R enables access to two 10/100/1000 Base-T networks. Each of the eight channels of the *LineSelect*® Model 9715R Cat5e A/B Switch allows the user to reroute data between two networks with a simple flip of a switch. The unit supports all 8 pins of the RJ45 Cat5e interface. No need to plug and unplug cables thereby eliminating connector wear. The *LineSelect*® Model 9715R is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

FEATURES:

- Efficient use of panel space; eight complete A/B switches in 1U panel height (1.75").
- Each channel allows quick connection to any one of two devices from one COMMON device.
- Rated for 10/100/1000 Base-T networks (Up to Cat 5e).
- Certifed for Cat 5e compliance.
- RoHS Compliant.
- All 8 pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- The switch ports are transparent to all data.
- Individual Channel Control via eight knobs located on the front panel, one knob per channel.
- High quality sealed switch with self-wiping precious metal contacts.
- Manually operated. No power required.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Lifetime warranty against manufacturing defects.
- Custom length Cat5e cables available for your switch installation for improved system performance.



SPECIFICATIONS:

PORT CONNECTORS: (24) RJ45 (F) connectors on rear panel; (8) COMMON ports, (8) "A" ports, (8) "B" ports.


FRONT PANEL CONTROL: (8) Rotary switches on front panel selects A or B for each channel.

PINS SWITCHED: All 8 pins switched.

POWER: No power required. Manually operated.

DIMENSIONS: Rackmount 19.0" W x 1.75" H x 8.63" D. $(48.3 \times 4.5 \times 22.0 \text{ cm})$

WEIGHT: Approximately 5.4 lbs (2.5 kg)

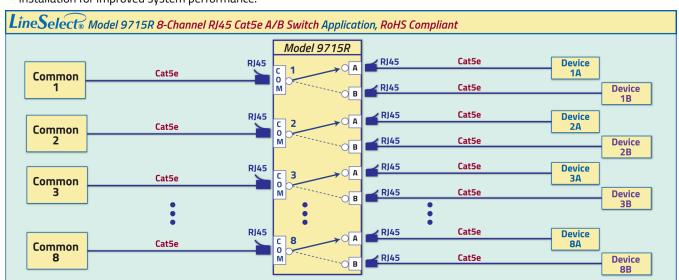

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com